

TANK SERIES

2 & 3 Piece Full Port Ball Valves

1" - 10" - Flush Bottom Design

The Geko Tank Series ball valves are welded flush to the tank bottom, providing a fast, unrestricted drainage of tank media. The valves are available in a wide selection of seat materials to meet a full range of applications.

The **Secure Mount** integrally cast top flange ensures positive actuator mounting. Actuation equipment can easily be removed while the valve is under full line pressure.

Geko's interchangeable family of valves offer advanced design features including interchangeable parts, precision ball, heavy-duty body, Smart Stem, double lock-nut design, safety trigger handle and locking device.

316SS

WCB

These models feature a 3 piece swing out body design that eases installation and field maintenance.

316SS or

WCB, ANSI Class 150

An economical 2 piece flanged by butt weld valve, this ideally suited for larger tanks, offering major cost savings over the 3 piece models.

End Connections

- > Treaded
- > Socket Weld
- > Butt Weld
- > ANSI 150 Flanged
- > Quick Clamp - Sanitary
- > Tube O.D.

Size Range

316SS - 1"-6"

WCB - 1"-6"

316SS or WCB - 2-1/2"-10"

Certification

PE(S)R UKCA S.I. 2016:1105




Dimensions (inch) 316SS / WCB

Size ins	A	A'	B	C	D	E	F	G	H	n	J	K	L	M	P	R	S	W	Wt. lb*
1	3.50	4.68	1.00	3.43	7.87	1.69	3.60	0.343	3.12	4	0.62	0.50	0.80	0.315	0.44	1.392	1.392	1/4-20UNC	4
1-1/2	4.63	6.22	1.50	4.13	9.84	2.21	5.38	0.50	3.88	4	0.62	0.55	0.92	0.374	0.63	1.949	1.949	5/16-18UNC	9
2	5.29	7.01	2.00	4.53	9.84	2.50	6.00	0.625	4.75	4	0.75	0.55	0.92	0.374	0.63	1.949	1.949	5/16-18UNC	14
3	7.95	9.03	3.00	6.42	15.35	3.98	10.00	0.688	6.00	4	0.75	1.75	3.07	0.669	1.10	3.543	1.874	1/2-13UNC	44
4	9.72	12.14	4.00	7.09	15.35	5.19	11.38	0.94	7.50	8	0.75	1.75	3.07	0.669	1.10	3.543	1.874	1/2-13UNC	70
6	—	14.95	6.00	12.20	43.30	7.19	12.10	1.00	9.50	8	0.88	1.65	3.54	1.02	1.71	3.375	3.375	1/2-13UNC	150


Dimensions (mm) 316SS / WCB

Size mm	A	A'	B	C	D	E	F	G	H	n	J	K	L	M	P	R	S	W	Wt. Kg*
25	89	119	25	87	200	43	91	8.7	79	4	16	13	20	8.0	11	35.4	35.4	—	2
40	118	158	38	105	250	56	137	12.7	99	4	16	14	23	9.5	16	49.5	49.5	—	4
50	134	178	51	115	250	63	152	15.9	121	4	19	14	23	9.5	16	49.5	49.5	—	6
80	202	229	76	163	390	101	254	17.5	152	4	19	45	78	17.0	28	90.0	47.6	—	20
100	247	308	102	180	390	132	289	23.9	191	8	19	45	78	17.0	28	90.0	47.6	—	32
150	—	380	152	310	1100	183	307	25.4	241	8	22	42	90	25.9	44	85.7	85.7	—	68


*Weights are approximate. Valve end connections vary in weight. | Consult factory for 8" valve dimensions. | 316 SS, has 316L Tank Pad for ease of welding.

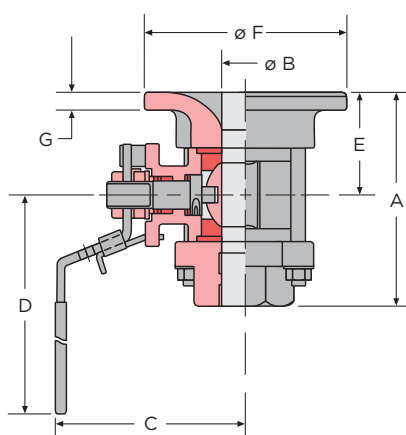

THREADED END

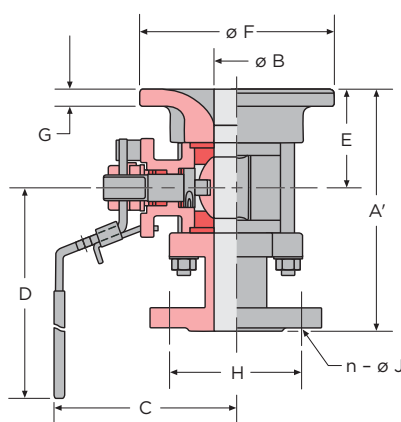

FLANGED END



ACTUATOR MOUNTING

Note: verify the dimensions before manufacturing mounting hardware.


Dimensions (inch)

Size in	A	B	C	D	Wt. lb*
2-1/2	5.84	2.50	6.22	15.40	27
3	6.85	3.00	6.54	15.40	35
4	8.25	4.00	7.20	15.40	58
6	12.97	6.00	11.22	39.00	90
8	15.00	7.87	CF	CF	200
10	18.51	9.84	CF	CF	375

Dimensions (mm)

Size mm	A	B	C	D	Wt. Kg*
65	148	64	158	391	12
80	174	76	166	391	16
100	210	102	183	391	26
150	329	152	285	991	41
200	381	200	CF	CF	91
250	470	250	CF	CF	170

Consult factory for 12" valve dimensions.

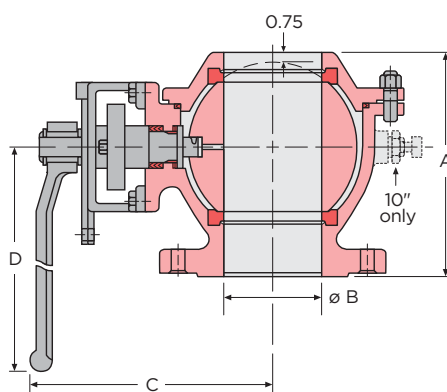

FLANGED BY BUTT WELD

Pressure Ratings

1"-4": 1000psi WOG
6"-10": 400psi WOG
ANSI CLASS 150
316SS = 275psi
WCB = 285psi

With special packing,
Valves comply with
API 607 4th Edition.